

## **GP-A SERIES** - 2 HP

### **APPLICATIONS**

Ideal for residential sewage waste transfer where high head conditions exist

#### **FEATURES**

- Powerful 2 hp single-phase, 3450 rpm with capacitor start/run motor with built-in overload protection to prevent over-current and over-temperature damage
- High starting torque motor to handle the demands of grinding domestic sewage
- Start/Run components encased in oil-free chamber unique for easy access requires no control panel
- Epoxy-coated cast iron finish for corrosion resistance and durability
- Mechanical seal: carbon/ceramic
- Deflection-resistant, short motor shaft
- Corrosion-resistant brass impeller
- Seven-vane, angled face, non-clogging impeller
- Tight cutting clearances for superior cutting action, grinding 414,000 cuts per minute





## SERIES SPECIFICATIONS

Item No.	Model	НР	Volts	Hz	Phase	Full Load		Switch Type/ Operation	Performance (GPM @ Height in Feet)					Shut-Off	PSI	Cord	Weight	
						Amps	Watts	Operation	20'	40′	60′	80′	100′	120′	(ft)			
520861	GP-A231-20M	2	208-230	60	1	13.9	3200	-	32	31	30	25	20	10	130	56	20' 6.1 m	101 lbs 45.8 Kg
520863	GP-A231-30M	2	208-230	60	1	13.9	3200	-	32	31	30	25	20	10	130	56	30′ 9.1 m	104 lbs 47.2 Kg

# **GRINDER PUMPS**


## **ENGINEERING DATA**

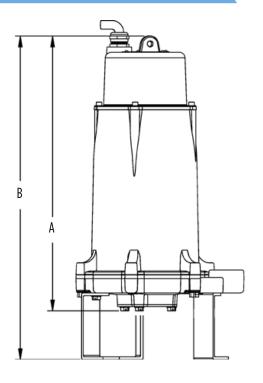



Model	A	В	С	D
CD A	18.61"	21.56"	11.5"	9.63"
GP-A	47.57 cm	54.76 cm	29.21 cm	24.46 cm

## PERFORMANCE DATA

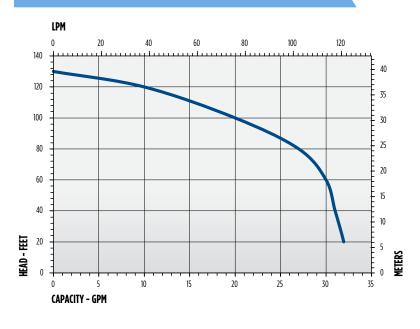

### CONSTRUCTION

Motor Cover	Cast iron with epoxy coating				
Motor Cover O-Ring	Nitrile				
Motor Design	Single-phase, capacitor start, capac-itor run				
Insulation Class	F				
Overload Protection	Internal, on winding thermal protector				
Motor Shaft	AISI 300 Series stainless steel				
Ball Bearing - Upper	Single row ball, 6203				
Ball Bearing - Lower	Single row ball, 6306				
Seal Housing	Cast iron with epoxy coating				
Mechanical Seal	Carbon/ceramic				
Volute	Cast iron with epoxy coating				
Impeller	Brass				
Rotating Cutter	2 blade design, AISI 440C stainless steel, through-hardened to Rockwell 55-60C				
Stationary Cutter	AISI 440C stainless steel, hardened to Rockwell 55-60C				
External Hardware	300 Series stainless steel				
Power Cable	Type SOW or SOW 14/3 AWG				